




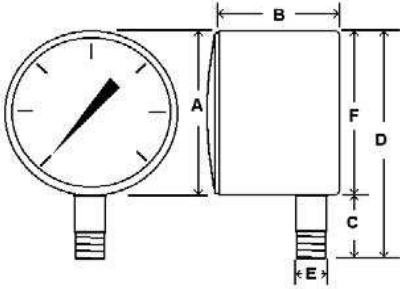

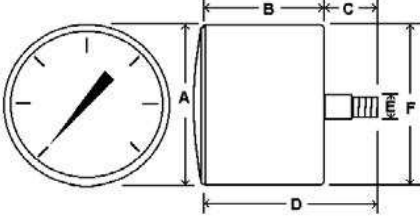

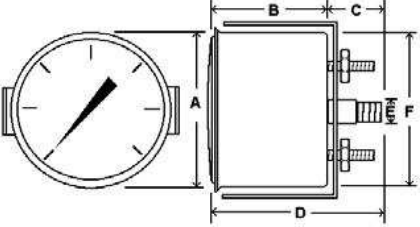

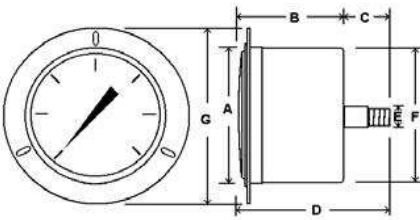
KC25 SERIES LOW PRESSURE

SPECIFICATIONS

- Chrome plated case
- Black steel case (u-clamp panel mnt)
- Brass internals and connection
- Dry non-fillable
- +/- 1.5 % accuracy

FEATURES

- 2 1/2" dial size with twist lock plastic lens
- zero adjustment screw on back of case
- 1/4" mnpt bottom or back connection
- Capsule type diaphragm to measure low pressures

		2 1/2"		4"		
		IN	MM	IN	MM	
KC25						
	A	2.60"	66	3.98"	101	
	B	1.70"	44	2.21"	56	
	C	.85"	22	1.56"	40	
	D	3.45"	87.5	5.49"	139	
	E	1/4"NPT		1/4" OR 1/2" NPT		
	F	2.60"	66	3.98"	101	
G						
KC25 CBM						
	A	2.62"	66.5	----	----	
	B	1.92"	49	----	----	
	C	.84"	21.5	----	----	
	D	2.75"	71	----	----	
	E	1/4"NPT		----	----	
	F	2.60"	66	----	----	
G			----	----		
KC25 Panel						
	A	2.84"	72	----	----	
	B	1.88"	48	----	----	
	C	.84"	21.5	----	----	
	D	2.74"	69.5	----	----	
	E	1/4"NPT		----	----	
	F	2.60"	66.2	----	----	
G	2.84	72	----	----		
KC25 Flange						
	A	2.61	66	----	----	
	B	1.89	48	----	----	
	C	.875	22.2	----	----	
	D	2.74	69.5	----	----	
	E	1/4"NPT		----	----	
	F	2.67	68	----	----	
G	3.44	87.4	----	----		

AVAILABLE RANGES:

200-0"wc Vacuum (2"Minor inc.)	0-30"wc (.5"wc minor inc.)	0-3 psi (.05 psi minor inc.)
160-0"wc Vacuum (2"Minor inc.)	20 oz./35"wc (.5"wc minor inc.)	0-5 psi (.1 psi minor inc.)
100-0"wc Vacuum (1"Minor inc.)	35 oz./60"wc (1" wc minor inc.)	0-10 psi (.2 psi minor inc.)
60-0"wc vacuum (1"Minor Inc.)	0-60"wc (1"wc minor inc.)	
30-0"wc vacuum (.5"wc minor)	0-100"wc (2"wc minor inc.)	
0-10"wc (.5"wc minor inc.)	0-160"wc (5"wc minor inc.)	
0-15"wc (.2"wc minor inc.)	0-200"wc (5"wc minor inc.)	

NOTE: OTHER RANGES AVAILABLE UPON REQUEST, PLEASE CALL WITH ANY INQUIRIES



KCLP1-SS ALL STAINLESS STEEL LOW PRESSURE DIAPHRAGM GAUGE

SPECIFICATIONS

STAINLESS STEEL CASE
316SS CAPSULE AND CONNECTION
PRECISION BRASS MOVEMENT
DRY NON-FILLABLE
+/- 1.6 % ACCURACY

FEATURES

2 1/2" or 4 "DIAL SIZE
STAINLESS STEEL CASE WITH REMOVABLE BEZEL
1/4"MNPT BOTTOM CONNECTION
CAPSULE TYPE SENSING ELEMENT TO MEASURE
LOW PRESSURES

2 1/2" Dial		2 1/2"	
		IN	MM
A	2.93"	74.5 mm	
B	2.57"	65 mm	
C	1.34"	34 mm	
D	.55"	14 mm	
E	.98"	25 mm	
		1/4"NPT	
4" Dial		4"	
		IN	MM
A	4.4"	112 mm	
B	3.9"	99 mm	
C	1.1"	28 mm	
D	.66"	17 mm	
E	1.21"	31 mm	

AVAILABLE RANGES:

0-10"wc (.5"wc minor inc.)	0-3 psi (.05 psi minor inc.)
0-15"wc (.2"wc minor inc.)	0-5 psi (.1 psi minor inc.)
0-30"wc (.5"wc minor inc.)	0-10 psi (.2 psi minor inc.)
0-60"wc (1"wc minor inc.)	
0-100"wc (2"wc minor inc.)	
0-160"wc (5"wc minor inc.)	
0-200"wc (5"wc minor inc.)	

NOTE: OTHER RANGES AVAILABLE UPON REQUEST , PLEASE CALL WITH ANY INQUIRIES

Also see out complete line of Low pressure Gauges



2 1/2" Dial
Chrome Case
Brass Wetted
Bottom Mount



2 1/2" Dial
Chrome Case
Brass Wetted
Back Mount



2 1/2" Dial
Chrome Case
Brass Wetted
U-Clamp
Panel Mount



2 1/2" Dial
Chrome Case
Brass Wetted
Front Flanged
Panel Mount



2 1/2" Dial
Stainless Case
Brass Wetted
Bottom Mount



4" Dial
Stainless Case
Brass Wetted
Bottom Mount