

SERIES 800/810



Switching Output Options Available:

- 2 switching outputs
- 1 switching output and 1 analog output (4...20 mA or 0...10 V)
- 2 switching outputs and 1 analog output (4...20 mA)

The NOSHOK 800 Series Electronic Indicating Pressure Switch/Transmitter provides continuous pressure monitoring and allows the programming of the set points without applying pressure. The set points, contact functions (normally open / normally closed), reset points, contact types (npn / prnp) and switching function (hysteresis / gate) are simple to adjust via the two buttons.

By the use of proven ceramic or thin film sensors, this pressure switch features a high level of repeatability and durability. The turnable display and the optional turnable process connection allow ease of installation and wiring.

SPECIFICATIONS

Pressure Ranges	Standard gauge ranges from -14.5 psig to 30 psig through 0 psig to 9999 psig
Pressure Sensor	Thick film ceramic strain gage for ranges through -15 psig to 1450 psig Sputtered thin film strain gage for all higher pressure ranges
Proof Pressure	2 times Full Scale for ranges Vacuum through 0 psig to 1450 psig. 1.75 times Full scale for ranges 0 psig to 1500 psig through 0 psig to 10000 psig
Burst Pressure	2.5 times Full Scale for ranges Vacuum through 0 psig to 1450 psig. 4 times Full scale for ranges 0 psig to 1500 psig through 0 psig to 10000 psig.
Wetted Materials	Stainless Steel with ceramic sensor and viton seal on ranges through 0 psig to 1450 psig (other sealing materials available upon request) Stainless Steel only for higher pressure ranges.
Housing Material	800-Stainless Steel, 810-Black Anodized Aluminum
Power Supply	12 - 30 Vdc unregulated
Signal Output	4 to 20 mA or 0 to 10 Vdc; programmable and freely adjustable
Switch Points	Individually adjustable via external control keys
Number	1 or 2 (PNP or NPN)
Function	NO/NC; windows - and hysteresis function freely adjustable
Switching rating	0.5 A max
Response time	<10 ms
Accuracy	<1% Full Scale
Display	7-Segment-LED, red 4-digit, height 0.3
Adjustment	Programmable on the display
Switch Point	0.5 to 100% of Full Scale
Hysteresis	0.5 to 99% of Full Scale
Current Consumption	<50 mA (without load)
Accuracy	<0.5% Full Scale (Best Fit Straight Line) ±1 Digit
Hysteresis	<0.2% Full Scale (<0.3 with pressure range <0 psi - 230 psi)
Repeatability	<0.2% Full Scale
Stability	<0.2% Full Scale (<0.3 with pressure range <0 psi - 230 psi)
Temperature Limits Media	-4°F to 176°F (-20°C to 85°C) (Thin Film Sensor) -4°F to 176°F (-20°C to 85°C) (Ceramic Sensor)
Ambient Storage	-4°F to 158°F (-20°C to 70°C) -22°F to 176°F (-30°C to 80°C)
Compensated Temp Range	32°F to 176°F (0°C to 80°C)
Thermal Zero Effect	± 0.07% Full Scale/°F
Thermal Span Effect	± 0.07% Full Scale/°F
CE compliance	89/336EWG interference emission and immunity see EN 61 326 97/23/EG Pressure equipment directive, Appendix 1
Vibration	> 10 g according to IEC 60068-2-6
Shock	> 50 g according to IEC 60068-2-27
Electrical Protection	Protected against reverse polarity, overvoltage and short circuit
Environmental Protection	NEMA 4 Per IEC 60529/EN 60529
Durability	>10 million Full Scale Cycles
Weight	Approx 0.62 lbs

FEATURES

- Pressure Ranges from -14.5 psig to 9999 psig
- 330° Rotatable Display-Head
- Integrated Password Protection
- Simple 2-Key Programming
- Four-Digit LED-Display
- Scaleable Analog Output
- Fast Response Time

OPTIONAL FEATURES

- 330° Rotatable Pressure Connection
- Minimum/Maximum Value Memory
- Output Dampening up to 2,000 msec
- Switching Time Delay

APPLICATIONS


- Hydraulic and Pneumatic Systems
- Molding and Extruding Equipment
- Stamping and Forming Presses
- Pumps and Compressors
- HVAC
- Power Generation
- Transportation Equipment
- Marine

ORDERING INFORMATION						
SERIES 800/810	800	Stainless Steel Housing	810	Black Anodized Aluminum Housing		
SWITCH FUNCTION	1	2 N.O. or 2 N.C. (PNP or NPN)	2	1 N.O. or 1 N.C. (PNP or NPN) with 4 mA to 20 mA Analog Output		
	3	1 N.O. or 1 N.C. (PNP or NPN) with 0 Vdc to 10 Vdc Analog Output	4	2 N.O. or 1 N.C. (PNP or NPN) with 4 mA to 20 mA Analog Output		
PROCESS CONNECTIONS	2	1/4" NPT male	5	1/4" NPT female	8	1/2" NPT male
	11	G1/2B male	19	G1/4B female	45	7/16-20 UNF SAE #4 (Non-Adjustable)
SWITCH ADJUSTMENT RANGE (MAXIMUM WORK PRESSURE)		-14.5 psig to 30 psig	14.5/30	0 psig to 145 psig	145	0 psig to 3750 psig
		-14.5 psig to 75 psig	14.5/75	0 psig to 300 psig	300	0 psig to 6000 psig
		-14.5 psig to 145 psig	14.5/145	0 psig to 750 psig	750	0 psig to 9000 psig
		0 psig to 30 psig	30	0 psig to 1450 psig	1450	
		0 psig to 75 psig	75	0 psig to 2400 psig	2400	
ELECTRICAL CONNECTIONS	2	M12 x 1 (4-Pin)	3	M12 x 1 (5-Pin), 2 switch and analog output		
OPTIONS	ORF	Threaded Orifice	RB	Rotatable Base	EH	Enhanced Software ¹


¹Includes Minimum/Maximum Value Memory, Output Dampening, Switching Time Delay

Wiring Diagrams


1 switching output (M12 x 1) with 4mA to 20 mA Signal p-switching

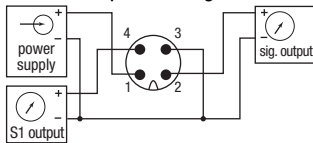


2 switching output (M12 x 1) p-switching




1 switching output (M12 x 1) with 4mA to 20 mA Signal n-switching



2 switching output (M12 x 1) n-switching



2 switching output (M12 x 1) with 4mA to 20 mA Signal p-switching




EXAMPLE

Series800
Switch Function ... 2 N.O. or N.C. (npn or npn)
Process Connection1/4" NPT male
Switch Adjustment Range .0 psig to 145 psig
Electrical Connection M12 x 1 (4-pin)
Option Orifice

800 - 1 - 2 - 145 - 2 - ORF

Outline Dimensions

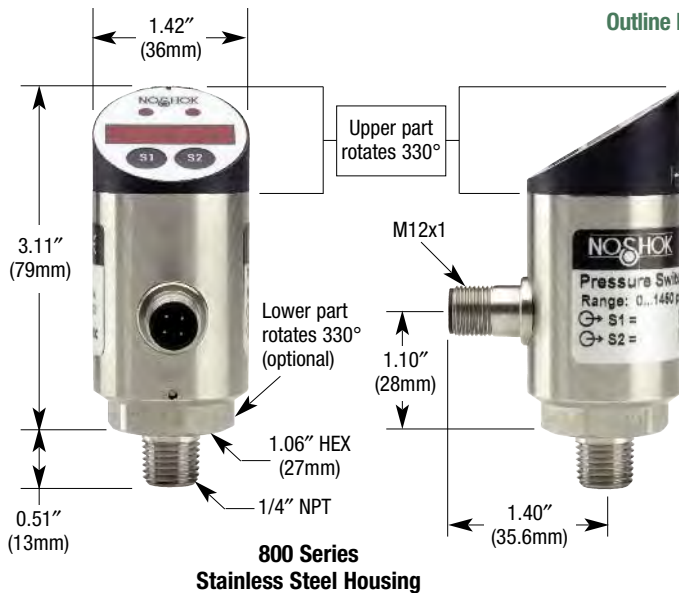

800 Series
Stainless Steel Housing



810 Series
Black anodized
Aluminum Housing