

MODEL 50

METAL CASE UTILITY PRESSURE GAUGES

Designed for general commercial and industrial markets to measure air, water, oil, gas or any medium not corrosive to brass.



SPECIFICATIONS:


Dial Size:	1-1/2", 2", 2-1/2" or 3-1/2"
Accuracy:	±3-2-3% ANSI Grade B
Case:	Black Painted Metal (dry only)
Socket:	Brass
Bourdon Tube:	Phosphor Bronze
Movement:	Brass
Lens:	Acrylic
Pointer:	Aluminum
Dial:	Aluminum
Connection:	1-1/2": 1/8" NPT Lower or Center Back 2": 1/8" NPT or 1/4" NPT Lower or Center Back 2-1/2": 1/4" NPT Lower or Center Back 3-1/2": 1/4" NPT Lower
Range:	See Range Chart
Scales:	psi & bar (kPa = bar x 100)

➤ AVAILABLE OPTIONS:

- Oxygen Cleaning
- **Other configurations available upon request**

Estimated Shipping Weight	
DIAL SIZE	DRY
1-1/2"	3 oz.
2"	5 oz.
2-1/2"	5 oz.
3-1/2"	8 oz.

➤ AVAILABLE CASE STYLES AND DIMENSIONS:

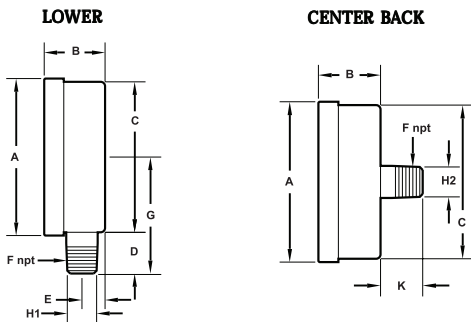

DIAL	NPT	A	B	C	D	E	G	H1	H2	K
1-1/2"	1/8"	1.69" (42,9mm)	1.06" (26,9mm)	1.65" (41,9mm)	0.82" (20,8mm)	0.35" (8,9mm)	1.65" (41,9mm)	0.55" (14mm)	0.47" (11,9mm)	0.67" (17mm)
2"	1/8"	2.13" (54,1mm)	1.10" (27,9mm)	2.05" (52,1mm)	0.82" (20,8mm)	0.35" (8,9mm)	1.85" (47mm)	0.55" (14mm)	0.55" (14mm)	0.90" (22,9mm)
2"	1/4"	2.13" (54,1mm)	1.10" (27,9mm)	2.05" (52,1mm)	0.94" (23,9mm)	0.35" (8,9mm)	1.97" (50mm)	0.55" (14mm)	0.55" (14mm)	0.90" (22,9mm)
2-1/2"	1/4"	2.52" (64mm)	1.10" (27,9mm)	2.48" (63mm)	0.92" (23,4mm)	0.35" (8,9mm)	2.16" (54,9mm)	0.55" (14mm)	0.55" (14mm)	0.90" (22,9mm)
3-1/2"	1/4"	3.54" (89,9mm)	1.18" (30mm)	3.44" (87,4mm)	0.96" (24,4mm)	0.43" (10,9mm)	2.68" (68,1mm)	0.55" (14mm)		



Tel-Tru Manufacturing Company
 408 St. Paul Street, Rochester, New York 14605 USA
 Phone: 585.232.1440 • 800.232.5335 • Fax: 585.232.3857 • E-mail: info@teltru.com • Web: www.teltru.com

► HOW TO ORDER:

To Build A Part Number: Select dial size & then select one code from each column to build your gauge.

DIAL	MODEL CODE	TUBE & SOCKET	CASE	CONN. SIZE	CONN. LOCATION	CONN. TYPE	RANGE & SCALE	OPTIONS
1-1/2"	15 50	B = Brass	C = Black Painted Steel	1 = 1/8"	L = Lower C = Center Back	1 = NPT	See Range Chart Up to 600 psi	Oxygen Cleaning *
2"	20 50	B = Brass	C = Black Painted Steel	1 = 1/8" 4 = 1/4"	L = Lower C = Center Back	1 = NPT	See Range Chart Up to 600 psi	Oxygen Cleaning *
2-1/2"	25 50	B = Brass	C = Black Painted Steel	4 = 1/4"	L = Lower C = Center Back	1 = NPT	See Range Chart	Oxygen Cleaning *
3-1/2"	35 50	B = Brass	C = Black Painted Steel	4 = 1/4"	L = Lower	1 = NPT	See Range Chart	Oxygen Cleaning *

* Oxygen cleaning is sold separately. Order part number 10000006.

Example:

Specs: 1-1/2", Model 50B, Brass, Black Painted Steel, 1/8" Lower, NPT, 0-600 psi/bar

Select:

15 50	B	C	1	L	1	F4F
-------	---	---	---	---	---	-----

Ordering Format: 1550BC1L1F4FL

► STANDARD RANGES:

Note: Dual Scale, psi/bar (KPA = bar x 100)

CODE = RANGE (psi)	INTERVALS (Hg) (psi)	DIVISIONS (Hg) (psi)
V1Z = 30" Hg	5"	.5"
Z2Z = 30-0-30	10" 10	1" 1
Z3Z = 30-0-60	10" 10	2" 1

CODE = RANGE (psi)	INTERVALS (psi)	DIVISIONS (psi)
B7F = 0-15	2	.2
C6F = 0-30	5	.5
D6F = 0-60	10	1
D9F = 0-100	20	2
E4F = 0-160	20	2
E5F = 0-200	40	5
E8F = 0-300	50	5
F2F = 0-400	50	5
F4F = 0-600	100	10

CODE = RANGE (psi)	INTERVALS (psi)	DIVISIONS (psi)
F8F = 0-1000	200	20



MODEL 51

PLASTIC CASE UTILITY PRESSURE GAUGES

General utility gauge designed for the pool, spa, and irrigation industries.




SPECIFICATIONS:

Dial Size:	1-1/2" or 2"
Accuracy:	±3-2-3% - ANSI Grade B
Case:	ABS Black Plastic (dry only)
Socket:	Brass
Bourdon Tube:	Phosphor Bronze
Movement:	Brass
Lens:	Acrylic
Pointer:	Aluminum
Dial:	Aluminum
Connection:	1-1/2": 1/8" NPT Center Back 2": 1/8" NPT or 1/4" NPT Lower or Center Back
Range:	See Range Chart
Scales:	psi

Estimated Shipping Weight	
DIAL SIZE	DRY
1-1/2"	3 oz.
2"	4 oz.

➤ AVAILABLE CASE STYLES AND DIMENSIONS:

DIAL	A	B	C	D	E	F	G	H	K
1-1/2"	1.76" (44,7mm)		1.76" (44,7mm)			1.06" (26,9mm)		0.47" (11,9mm)	0.62" (15,7mm)
2"	2.12" (53,8mm)	1.10" (27,9mm)	2.08" (52,8mm)	0.87" (22,1mm)	0.35" (8,9mm)	1.06" (26,9mm)	1.93" (49mm)	0.55" (14mm)	0.90" (22,9mm)

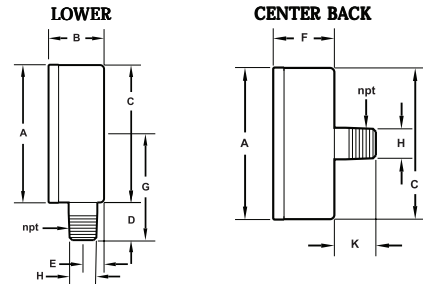

➤ HOW TO ORDER:

To Build A Part Number: Select one code from each column to build your gauge.

DIAL	MODEL CODE	TUBE & SOCKET	CASE	CONN. SIZE	CONN. LOCATION	CONN. TYPE	RANGE & SCALE
1-1/2"	15 51	B = Brass	P = ABS Black Plastic	1 = 1/8"	C = Center Back	1 = NPT	See Range Chart
2"	20 51	B = Brass	P = ABS Black Plastic	1 = 1/8" 4 = 1/4"	L = Lower C = Center Back	1 = NPT	See Range Chart

Example:

Specs: 1-1/2", Model 51B, Brass, Black Plastic, 1/8" Center Back, NPT, 0-30 psi

Select:	15 51	B	P	1	C	1	C6A
----------------	-------	---	---	---	---	---	-----

Ordering Format: 1551BP1C1C6A

➤ STANDARD RANGES*:

CODE = RANGE (psi)	INTERVALS (Hg) (psi)	DIVISIONS (Hg) (psi)
Z3A = 30-0-60	10" 10	2" 1
Z2A = 30-0-30	10" 10	2" 2
C6A = 0-30	5	2
D6A = 0-60	10	2
D9A = 0-100	20	2

*Other ranges available for special order, consult factory.